Model 422 Pressure Transmitter



MODEL 422 PRESSURE TRANSMITTER

0-5 VDC, 0-3 TO 5000 PSI DESIGNED FOR OVERHEAD JUNCTION BOXES

Model 422 is small in size, but packs
a high-performance punch. The electronics
and silicon sensor design have a combined
accuracy of better than ±0.08%.

PERFORMANCE

Full Scale Pressure Range (FSPR)	0-3 thru 0-5000 PSI (0-0.2 to 0-345 bar), 0-15 PSIV (0-1.03 barV)*
Zero balance	≤± 0.25% FSO
Non-Linearity (Best Fit Straight Line)	≤±0.06% FSO standard, optional ±0.04%
Hysteresis & Repeatability	≤±0.06% FSO standard
Full Scale Output	5 Vdc≤ ± 0.25% FSO
Long Term Stability	≤± 0.3% FSO per 6 months
Compensated Temperature*	32°F to 180°F (0°C to 82°C)
Operating Temperature Range	-40°F to 185°F (-40°C to 85°C)
Storage Temperature	-40°F to 250°F (-40°C to 121°C)
Maximum Fluid Temperature	250°F (121°C)
Combined Thermal Effect (zero & span)	≤±2% FSO per 100°F typical
* Modified specification for vacuum and compound ranges:	Compensated Temperature Range 32°F to 170°F (0°C to 77°C)

ELECTRICAL

Supply Voltage	9 to 30 Vdc (12 to 30 Vdc for DM option)
Power Supply Regulation	<±0.05% FSO per Volt Output Signal
Output Signal	0-5 Vdc
Circuit Protection	Short circuit and reverse polarity protected
Voltage Spike Protection	Withstand 1000 volt spike per EN6100-4-5
RFI/EMI Suppression	CE marked, EN 61326
Insulation Resistance	<5nS conductance
Response Time	<1.5 millisecond
Electrical Connections	6-pin bayonet (standard)
Pin Outs	Pin A +Power Pin B -Power Pin C +Signal Pin D -Signal Pin E AC ground (standard) Pin F No connection
Connector Options	BP Micro change (M12) BN 4-pin bayonet ZU Cable gland

© Viatran 2026 Information is accurate to the best of Viatran's knowledge. We reserve the right to change specifications at any time. Please contact Viatran for specific order inquiries.
199 Fire Tower Drive, Tonawanda, New York 14150 USA USA Phone: 716.629.3800 Toll Free: 800.688.0030 Fax: 716.693.9162 Email: solutions@viatran.com

Model 422 Pressure Transmitter

- All Stainless Steel construction
- High Accuracy
- Shunt Calibration circuit option
- Low Pressure Applications

Model 422 is a versatile high performance test and control sensor that offers a fast response time, noise immunity, and is CE compliant. Viatran takes pride in offering excellent customer support combined with a technically superior product. Variants of this model are found throughout the automotive and industrial industries.

MECHANICAL

Pressure Connection	1/8" NPT female
Proof Pressure	3x range or 1,200 PSI (whichever is less) for 0-3 thru 0-500 PSI 3x range or 9,000 PSI (whichever is less) for 0-1,000 thru 5,000 PSI
Burst Pressure	5x range or 2,400 PSI (whichever is less) for 0-3 thru 0-500 PSI 5x range or 10,000 PSI (whichever is less) for 0-1,000 thru 0-5,000 PSI
Pressure Cavity Volume	1.5 mL
Mounting	May be supported by process piping

MATERIALS OF CONSTRUCTION

Wetted Parts	316L stainless steel
Housing	316 stainless steel
Weight	4 oz nominal
Identification	Laser etched onto body

OPTIONS

DA	Isolated internal shunt calibration (6-pin connector required)
DC	Extended Compensated Temperature Range (Cold) -40°F to 170°F (-40°C to 77°C)
DE	Internal shunt calibration (6-pin connector required)
DG	Improved temperature performance
DH	Special range
DM	Modified FSO>5Vdc (Requires 12 to 30 Vdc Supply Voltage)
DN	Improved linearity ±0.04% FSO (not available with TU option)
DQ	Cleaning for oxygen service
DX	Modified FSO<5Vdc
EA	Special calibration
EH	Extended Compensated Temperature Range (Hot) +70°F to 185°F (21°C to 85°C)
LV	Externally powered, optically isolated shunt calibration (6-pin connector required)
NH	Customer specified marking
TU	Compound special ranging
Alternate Pressure Ports	
VE	1/4 AN bulkhead mount
VF	1/4 tube Swagelok bulkhead
VG	M12 x 1.5 mm female
VH	M12 x 1.5 mm male
WQ	G 1/4 female
YA	MS33649-04

© Viatran 2026 Information is accurate to the best of Viatran's knowledge. We reserve the right to change specifications at any time. Please contact Viatran for specific order inquiries.
199 Fire Tower Drive, Tonawanda, New York 14150 USA USA Phone: 716.629.3800 Toll Free: 800.688.0030 Fax: 716.693.9162 Email: solutions@viatran.com

Model 422 Pressure Transmitter

Model 422 EMC Declaration of Conformity


CE Declaration of Conformity (RoHS)

Russian Metrology Certification

YC	MS33656-04
YH	1/8" NPTM
YL	1/8" NPTF (standard)
YJ	1/4" NPTF
YK	1/4" NPTM

© Viatran 2026 Information is accurate to the best of Viatran's knowledge. We reserve the right to change specifications at any time. Please contact Viatran for specific order inquiries.
199 Fire Tower Drive, Tonawanda, New York 14150 USA USA Phone: 716.629.3800 Toll Free: 800.688.0030 Fax: 716.693.9162 Email: solutions@viatran.com

Model 422 Pressure Transmitter

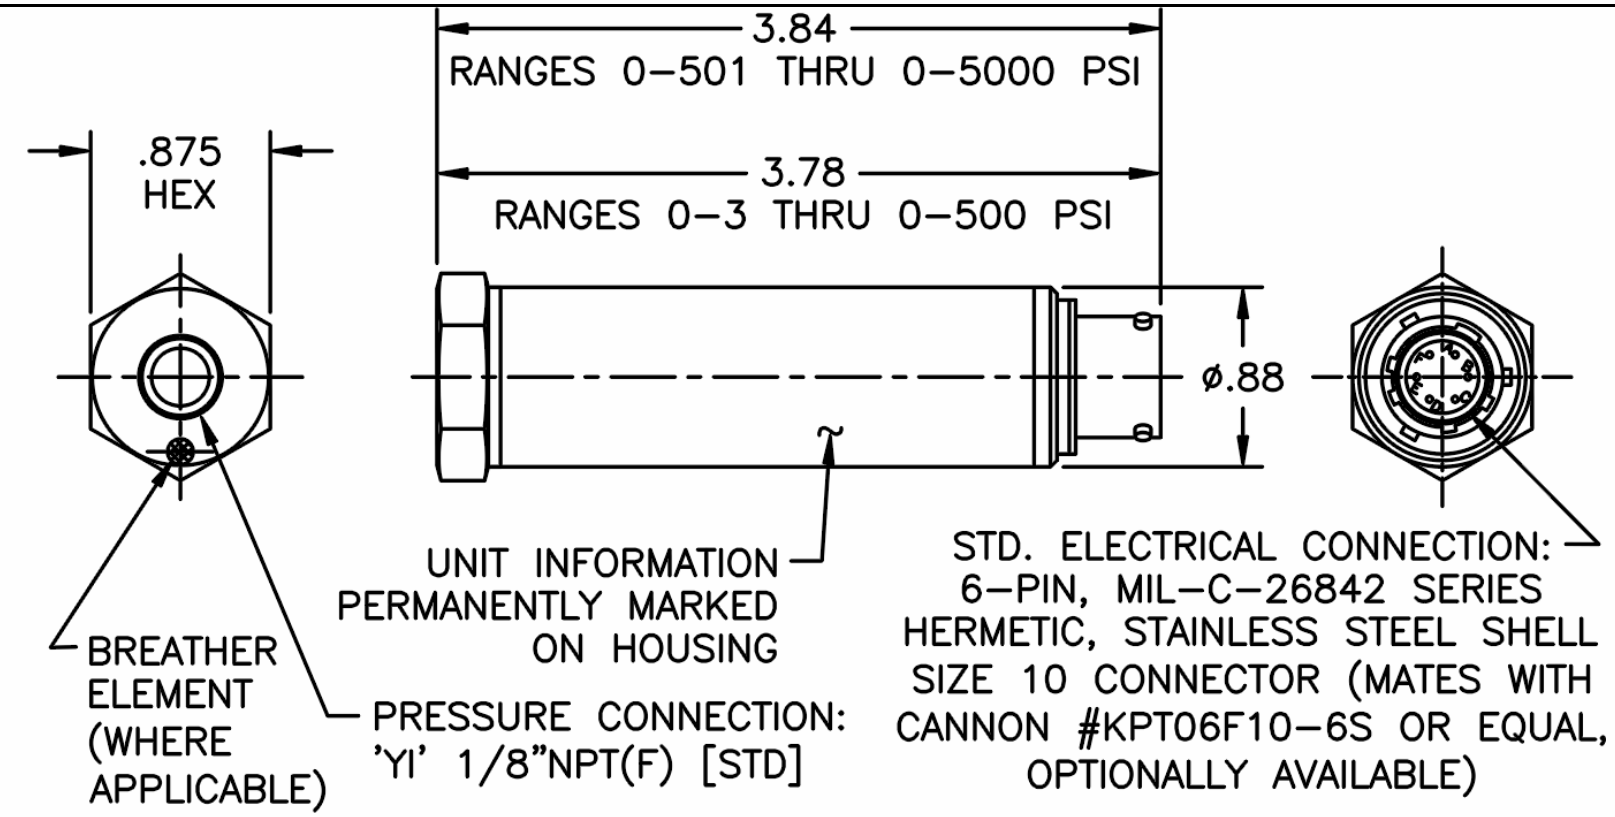

© Viatran 2026 Information is accurate to the best of Viatran's knowledge. We reserve the right to change specifications at any time. Please contact Viatran for specific order inquiries.
199 Fire Tower Drive, Tonawanda, New York 14150 USA USA Phone: 716.629.3800 Toll Free: 800.688.0030 Fax: 716.693.9162 Email: solutions@viatran.com