Model RM570
Pressure Transmitter



MODEL RM570 PRESSURE TRANSMITTER

4-20 MA, 0-100 BAR THRU 0-350 BAR

RM 570 transmitters provide a rugged, sealed solution for the harsh industrial environments found in Rolling Mills and the metals industry.

PERFORMANCE

Full Scale Pressure Range (FSPR)	0-100 Bar (0-1450 psi) 0-150 Bar (0-2175 psi) 0-250 Bar (0-3625 psi) 0-350 Bar (0-5076 psi)
Static Error Band	≤±0.25% FSO typical (Includes BFSL, Hysteresis and Repeatability by RSS)
Full Scale Output (FSO)	4-20 mA (16 mA FSO)
Zero and Span Balance	±1% FSO
Response Time	<2 mSec to reach 90% FSO
Temperature Effect on Zero	≤±1% FSO per 100°F (55.5°C)
Temperature Effect on Span	≤±1% FSO per 100°F (55.5°C)
Compensated Temperature	70°F to 170°F (21°C to 76°C)
Operating Temperature	-40°F to 185°F (-40°C to 85°C)
Storage Temperature Limit	-65°F to 185°F (-53°C to 85°C)

ELECTRICAL

Supply Voltage	12 to 30 Vdc
Power Supply Regulation Effect	≤±0.02% FSO per Volt
Output Signal	4 - 20 mA
Bridge Impedance	5000 Ohms nominal
Circuit Protection	Varistor protected across the input leads for surges above 40 V and currents to 250 Amps peak with a pulse width of 8x20 µSecs. Reverse polarity protected.
Insulation Resistance	>200 MegOhms to case ground
Electrical Connection - BH (Standard)	6-pin hermetic, bayonet-style, 303 SST weld mount connector
Pin Outs (standard)	Consult engineering for alternative configurations
Pin A	+Power/Signal
Pin B	No Connection
Pin C	-Power/Signal
Pin D	No Connection
Pin E	No Connection
Pin F	No Connection
ZU (optional)	Direct Coupled Cable - Custom wiring per your application

© Viatran 2026 Information is accurate to the best of Viatran's knowledge. We reserve the right to change specifications at any time. Please contact Viatran for specific order inquiries.
199 Fire Tower Drive, Tonawanda, New York 14150 USA USA Phone: 716.629.3800 Toll Free: 800.688.0030 Fax: 716.693.9162 Email: solutions@viatran.com

Model RM570
Pressure Transmitter

- Many Options available
- All Stainless Steel construction
- High Overpressure Applications
- IP-68 Rated



All welded construction and stainless steel surfaces makes the RM570 ideal for harsh environments. Viatran's rugged pressure transmitters are designed to withstand heat, vibration, pressure spikes and EMI/RFI caused by the the surrounding equipment.

All Viatran Rolling Mill units are built and configured to order with a choice of four pressure ranges,ensuring you have the best solution for your application.

MECHANICAL

Pressure Connections	G 1/2A BSP(M) with Bleed Port* G 1/2A BSP(M) without Bleed Port G 1/4B BSP(M) without Bleed Port
Proof Pressure	Up to 4 times FSPR (1378 Bar* (20,000 psi),whichever is less)
Burst Pressure	≥ 6 to 10 times FSPR dependent on sensor, consult engineering for details
Mounting	Supported by process piping or optional mounting bracket

MATERIALS OF CONSTRUCTION

Enclosure	15-5 PH and 316 stainless steel
Wetted Parts	15-5 PH stainless steel
Shock Limitation	100 G's
Weight	17 oz. (0.482 kilograms) typical
Identification	Laser etched onto body
Enclosure	Classification IP68

OPTIONS

B ( )	Alternate Electrical Connections**
DF	Bleed port (10K PSI and below)
EA	Special calibration run
NH	Customer specified identification
NJ	CE Marking
Y ( )	Alternate pressure ports
ZU	Direct Coupled Cable**
Note:	Application of some available options may affect standard performance. Consult your Viatran Representative for details. * For safety purposes, Viatran will only proof pressure in production to 700 Bar (10.000 psi) for units with Bleed Ports. ** Custom wiring / pin outs avilable for your application.

© Viatran 2026 Information is accurate to the best of Viatran's knowledge. We reserve the right to change specifications at any time. Please contact Viatran for specific order inquiries.
199 Fire Tower Drive, Tonawanda, New York 14150 USA USA Phone: 716.629.3800 Toll Free: 800.688.0030 Fax: 716.693.9162 Email: solutions@viatran.com

Model RM570
Pressure Transmitter


Model 570 EMC Declaration of Conformity

© Viatran 2026 Information is accurate to the best of Viatran's knowledge. We reserve the right to change specifications at any time. Please contact Viatran for specific order inquiries.
199 Fire Tower Drive, Tonawanda, New York 14150 USA USA Phone: 716.629.3800 Toll Free: 800.688.0030 Fax: 716.693.9162 Email: solutions@viatran.com

Model RM570
Pressure Transmitter

NOTE:

1. ALL DIMENSIONS ARE NOMINAL, IN INCHES [cm] AND FOR REFERENCE PURPOSES ONLY

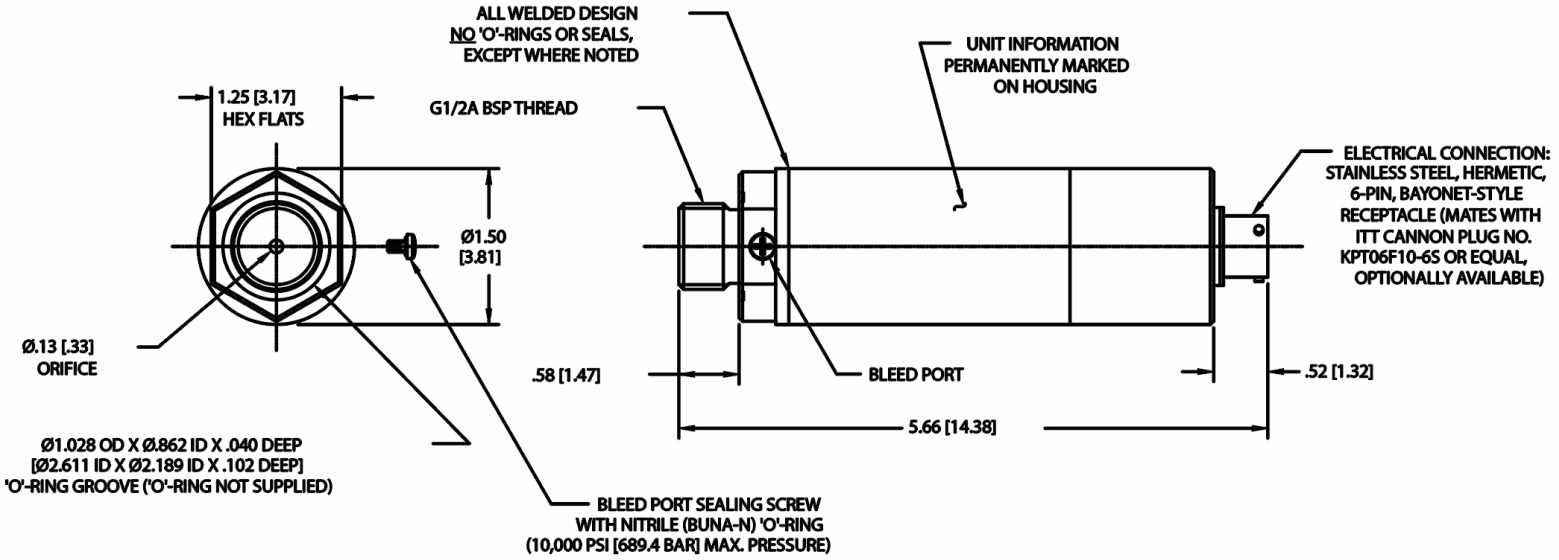

© Viatran 2026 Information is accurate to the best of Viatran's knowledge. We reserve the right to change specifications at any time. Please contact Viatran for specific order inquiries.
199 Fire Tower Drive, Tonawanda, New York 14150 USA USA Phone: 716.629.3800 Toll Free: 800.688.0030 Fax: 716.693.9162 Email: solutions@viatran.com